



CODE 1009

Gomito a 90° con derivazione femmina - 90° Elbow with threaded female take off - Coude à 90° avec dérivation femelle
Codo 90° con salida rosca hembra - Winkel 90° mit Innengewinde - Колено 90° с внутренней резьбой



CODE	DIM dxg [mmxin]	D [mm]	I [mm]	H [mm]	L [mm]	L1 [mm]	PN [bar]	PACK RIF. 2	PACK RIF. 5
1009016002001	16x1/2"	42	40	18	54	48	16	80	-
1009016003001	16x3/4"	42	40	18	54	48	16	80	-
1009020002001	20x1/2"	46	46	18	57	39	16	60	350
1009020003001	20x3/4"	46	46	18	57	40	16	60	330
1009025002001	25x1/2"	55	54	18	66	45	16	35	210
1009025003001	25x3/4"	55	54	18	66	45	16	35	210
1009025004001	25x1"	55	54	20	66	48	16	35	200
1009032002001	32x1/2"	63	58	17	78	48	16	25	130
1009032003001	32x3/4"	63	58	18	78	49	16	25	130
1009032004001	32x1"	63	58	21	78	51	16	25	130
1009032005001	*32x1"1/4	63	58	26	78	60	16	25	110
1009040003001	40x3/4"	80	71	18	95	55	16	15	70
1009040004001	40x1"	80	71	21	95	59	16	15	70
1009040005001	*40x1"1/4	80	71	25	95	64	16	15	60
1009040006001	*40x1"1/2	80	71	25	95	66	16	15	60

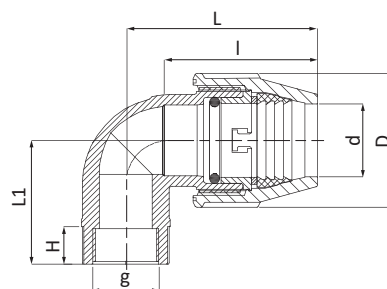

>>>>

CODE	DIM dxg [mmxin]	D [mm]	I [mm]	H [mm]	L [mm]	L1 [mm]	PN [bar]	PACK RIF. 2	PACK RIF. 5
1009051005001	*50x1"1/4	96	103	24	130	85	16	-	29
1009051006001	*50x1"1/2	96	103	27	130	92	16	-	29
1009051007001	*50x2"	96	103	27	130	98	16	-	29
1009064006001	*63x1"1/2	115	130	26	160	101	16	-	17
1009064007001	*63x2"	115	130	35	160	108	16	-	17
1009064008001	*63x2"1/2	115	130	35	160	108	16	-	17
1009076007001	*75x2"	129	143	36	180	123	16	-	11
1009076008001	*75x2"1/2	129	143	37	180	125	16	-	10
1009076009001	*75x3"	129	143	38	180	129	16	-	10
1009091009001	*90x3"	155	158	40	200	140	16	-	6
1009091010001	*90x4"	155	158	40	200	142	16	-	6
1009111009001	*110x3"	183	211	40	265	134	16	-	4
1009111010001	*110x4"	183	211	40	265	138	16	-	4

* La bocca filettata è rinforzata da un anello di acciaio inox - * The threaded end is reinforced with a stainless steel ring

* La bouche filetée est renforcée par une bague en acier inox - * La boca filetiada está reforzada por un anillo de acero inox

* Die Gewindeöffnung ist mit einem Ring aus rostfreiem Stahl verstärkt - * Конец резьбы усилен кольцом из нержавеющей стали